



SPEC SHEET

KoolMore Commercial 10 Pan Reach In Blast Chiller 88 lbs Rapid Chill / 77 lbs Rapid Freeze


Model: **KM-CBLC-10**

FEATURES

- **Rapid Chilling:** Cools 88 lbs. from 194°F to 37°F in 90 minutes, avoiding spoilage range.
- **Quick-Freezing:** Freezes 77 lbs. from 194°F to 0°F in 230 minutes, preserving quality.
- **Auto Preservation:** Switches to refrigerator mode post-cooling/freezing (short-term only).
- **Food Probe:** Precise temp monitoring with heated probe for easy removal.
- **2 HP Compressor:** Fast, uniform cooling for busy kitchens.
- **Stainless Steel:** 304-grade interior for hygiene; 201-grade exterior for durability.
- **Digital Controls:** Precise, easy temp control down to -22°F.
- **10-Pan Capacity:** Holds 110 lbs., ideal for high-volume use.
- **Quiet:** Operates at 70 dB for a calmer kitchen.
- **Easy Maintenance:** Auto defrost and removable dust filter.
- **Certified & Warranty:** ETL, HACCP compliant; 1-year parts and labor.



CLOSE UP IMAGES



TECHNICAL SPECS

Dimensions

Length	30.8
Width	30.75
Height	61.4
Weight Lbs	278
Interior Depth	16.1
Interior Width	25.4
Interior Height	41.14
Depth Excluding Handles	30.55
Depth Including Handles	30.55
Depth Less Door	30.6
Depth With Door Open 90 Degrees	59.06
Power Cord Length	59
Minimum Back Air Clearance (In)	4 In.
Minimum Side Air Clearance (In)	4 In.

Capacity

Gross Cubic Feet	9.74
Pan Capacity	10 Full Size
Maximum Shelf Capacity	11 lbs.


Features & Materials

Defrost Type	Automatic
Refrigerant Type	R-290
Cooling Unit Type	Automatic
Compressor Location	Bottom
Number Of Doors	1
Door Style	Swing
Number Of Shelves	10
Temperature Range	-22 F
Ambient Temperature Range	64-89.6 F
Control Type	Digital
Color Finish	Brushed Stainless-steel
Color Door Handles	Brushed Stainless-steel
Hinge Location	Right Side
Reversible Door(s)	No
Self-Closing Door	Yes
Noise	70 db
Interior Material	Stainless-Steel 304
Exterior Material	Stainless-Steel 201
Door Material	Stainless-Steel
Gauge Of Stainless Steel	26
Legs Material	Plastic and Stainless-Steel
Legs Adjustable	Yes

Electric & Certification

Amps	12
Hertz	60
Horsepower	2
Phase	1
Plug Type	NEMA 5-15P
Voltage	120
Wattage	1300
Certifications	ETL Listed for Safety and Sanitation and HACCP Compliant

Plan View

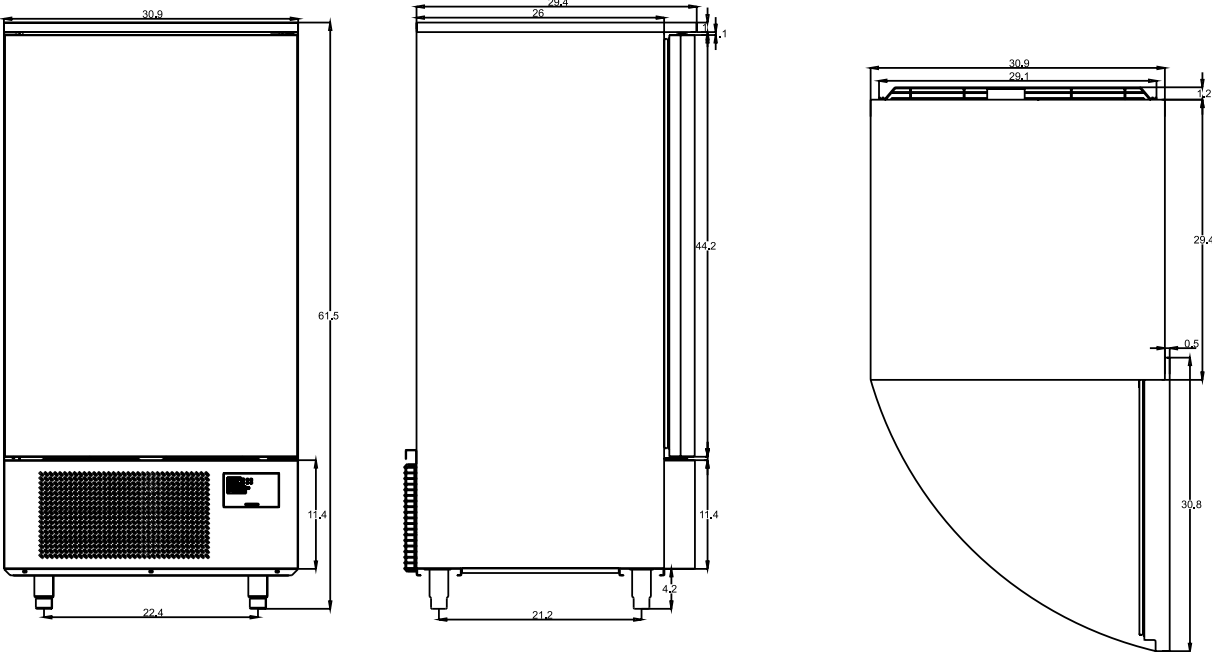

CERTIFICATIONS

Intertek Intertek



706 Eastern Parkway STE 1G, Brooklyn NY 11213
718-576-6342
info@koolmore.com