



# SPEC SHEET

## KoolMore 33 in. Commercial Non-Insulated Heated Holding Cabinet with Wire Racks and Glass Door in Silver

Model: KM-CH36-WNGL

### FEATURES

- Commercial Holding Cabinet
- Aluminum Exterior
- Voltage: 120V
- Watts: 1500W
- Wire Racks
- UL and NSF Certifications



### CLOSE UP IMAGES



# TECHNICAL SPECS

## Dimensions

|                   |        |
|-------------------|--------|
| Length            | 33.1   |
| Width             | 23.1   |
| Height            | 66.4   |
| Interior depth    | 27.2   |
| Interior width    | 18.3   |
| Interior height   | 53.88  |
| Power cord length | 102.36 |
| Weightlbs         | 127.6  |

## Capacity

|                  |       |
|------------------|-------|
| Gross cubic feet | 20.2  |
| Net cubic feet   | 18.15 |


## Features & materials

|                             |                                                                                                                                                |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Control type                | Mechanical                                                                                                                                     |
| Temperature range           | 75-185 F                                                                                                                                       |
| Number of doors             | 1                                                                                                                                              |
| Hinge location              | Top and Bottom                                                                                                                                 |
| Rack positions              | 16                                                                                                                                             |
| Pan capacity                | 16                                                                                                                                             |
| Exhaust vent location       | Bottom of the Rear of the Unit                                                                                                                 |
| Interior cabinet insulation | NA                                                                                                                                             |
| Exterior material           | Aluminum                                                                                                                                       |
| Interior material           | Aluminum                                                                                                                                       |
| Glass type                  | Polycarbonate                                                                                                                                  |
| Color finish                | Silver                                                                                                                                         |
| Interior lights             | No                                                                                                                                             |
| Casters                     | 4                                                                                                                                              |
| Feature one                 | "4 Polyurethane Swivel Casters, 2 with Brakes"                                                                                                 |
| Feature two                 | Full size non- insulated design holds up to 36 full size sheet pans; 1 1/2" of clearance between slides, heat only, with wire racks,clear door |

## Electric & certification

|                              |                                             |
|------------------------------|---------------------------------------------|
| Electrical installation type | Plug-in                                     |
| Amps                         | 14                                          |
| Hertz                        | 60                                          |
| Phase                        | 1                                           |
| Voltage                      | 120                                         |
| Wattage                      | 1500W                                       |
| Plug type                    | Nema 5-15P                                  |
| Certifications               | UL Listed for Safety and NSF for Sanitation |

# Plan View

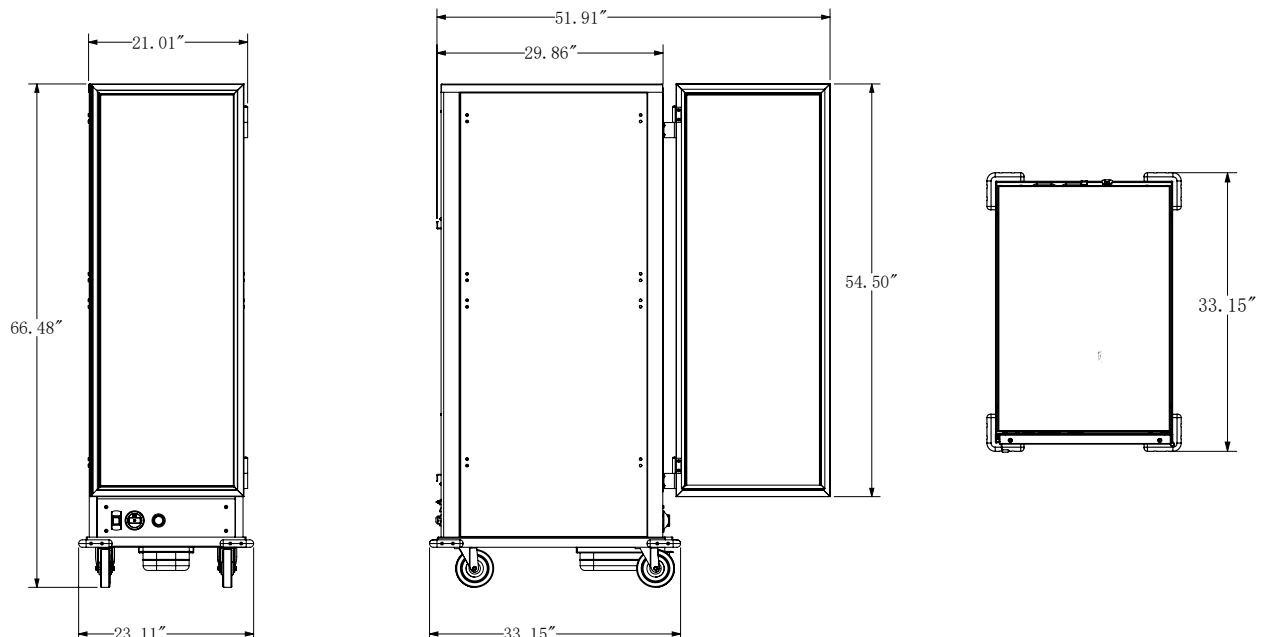

## CERTIFICATIONS



706 Eastern Parkway STE 1G, Brooklyn NY 11213  
718-576-6342  
info@koolmore.com