



# SPEC SHEET

## KoolMore 40 lb. Floor Standing Liquid Propane Commercial Fryer with 90,000 BTU in Stainless-Steel, ETL Listed


Model: KM-FDF40-LP

### FEATURES

- Commercial Liquid Propane Deep Fryer
- Oil Capacity: 40 lbs.
- Number of Baskets: 2
- Number of Tubes: 3
- Stainless-Steel Finish
- 90,000 BTUs
- Temperature Range: 200-400°F



### CLOSE UP IMAGES



# TECHNICAL SPECS

## Dimensions

|                 |       |
|-----------------|-------|
| Length          | 15.6  |
| Width           | 30.1  |
| Height          | 45.8  |
| Interior Width  | 14    |
| Interior Depth  | 13.85 |
| Interior Height | 4.2   |
| Weight Lbs      | 134   |




## Features & Materials

|  |  |
|--|--|
| Oil Capacity                           | 40lbs (18L)  |
| Installation Type                      | Freestanding   |
| Control Location                       | Inside the Cabinet at the Front  |
| Number Of Temperature Cooking Controls | 1  |
| Number Of Burners                      | 3  |
| Cooking Area Sq                        | 193.9  |
| Temperature Range                      | 200F-400 F   |
| Number Of Baskets                      | 2  |
| Basket Lifts                           | Yes  |
| Automatic Filtration                   | No   |
| Exterior Material                      | Stainless-Steel 430  |
| Interior Material                      | Stainless-Steel 439  |
| Color Finish                           | Silver   |
| Cooktop Surface Type                   | Stainless-Steel 430  |
| Casters                                |  |
| Number Of Feet                         | 4  |
| Legs Adjustable                        | Yes, 2 inches  |
| Feature One                            | Large cold zone area   |
| Feature Two                            | 1-1/4" full port ball type drain valve   |
| Feature Three                          | 2 layer front door liner with overflow pipe holder                             |
| Feature Four                           | Thermostat control adjusts from 200° to 400 °F                                 |
| Feature Five                           | Hi-limit shut-off protector shuts off gas combination valve and standing pilot |
| Feature Six                            | Built in flue deflector installed  |
| Feature Seven                          | Removable stainless steel wire basket holder                                   |

## Fuel Info & Certifications

|                                   |                                      |
|-----------------------------------|--------------------------------------|
| Fuel Type                         | LP                                   |
| Convertible                       | Not Included                         |
| Gas Inlet Size                    | 0.75                                 |
| Diameter Of Drain Line Connection | 1.25 in.                             |
| Btu Per Burner                    | 30000                                |
| Number Of Tubes                   | 3                                    |
| Control Type                      | Manual                               |
| Certifications                    | ETL Listed for Safety and Sanitation |

# Plan View

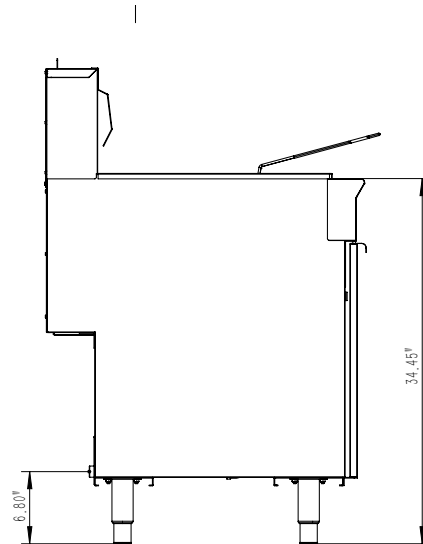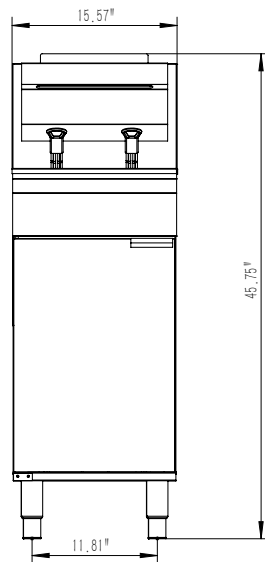

## CERTIFICATIONS



706 Eastern Parkway STE 1G, Brooklyn NY 11213  
718-576-6342  
info@koolmore.com