



SPEC SHEET

54 In. Two-Glass-Door Commercial Reach-In Refrigerator with Top-Mounted Compressor, 49 Cu. Ft. in Stainless-Steel



Model: KM-RIR-2D-GD-TM

FEATURES

- **Glass Door Merchandiser Design for Maximum Visibility:** Features dual-pane glass doors that showcase contents clearly, ideal for beverages, packaged goods, and grab-and-go items.
- **Top-Mounted Compressor for Cleaner Operation:** Keeps the refrigeration system away from floor-level dust and grease, improving air flow, reducing maintenance, and extending equipment life.
- **Optimal Temperature Range for Fresh Food Storage:** Maintains consistent temperatures from 33°F to 40°F, ensuring safe and reliable storage of perishable items.
- **Durable Stainless-Steel Interior and Exterior:** Built with stainless steel inside and out for long-lasting durability, corrosion resistance, and easy cleaning.
- **Spacious Interior with Adjustable Shelving:** Includes 6 adjustable heavy-duty shelves for flexible organization and high-capacity storage.
- **Digital Temperature Control with LED Display:** Provides precise, easy-to-monitor temperature management for consistent performance.
- **Interior LED Lighting for Clear Visibility:** Bright LED lighting ensures excellent visibility of stored items.
- **Mobility with Casters for Easy Positioning:** Equipped with casters for smooth movement, cleaning access, and flexible placement.



CLOSE UP IMAGES



Technical Specs

Dimensions & Weight

Length	54 in.
Width	33 in.
Height	81.7 in.
Weight	440 lbs.
Interior Depth	24.4 in.
Interior Width	49.4 in.
Interior Height	56.7 in.
Shelf Depth	25.2 in.
Shelf Width	20.87 in.
Height to Top of Door Hinge	67.7 in.
Depth Including Handles	33 in.
Depth Excluding Handles	31.5 in.
Depth With Door Open 90 Degrees	57 in.
Minimum Back Air Clearance	2 in.
Minimum Side Air Clearance	2 in.

Electric & Certifications

Voltage	115
Wattage	456
Hertz	60
Amps	4.2
Phase	1
Electrical Installation Type	Plug-in
Plug Type	NEMA 5-15P
Power Cord Included	Yes
Power Cord Length	98 in.
Energy Consumption	1051 kWh/Year
Certifications	ETL Listed for Safety and Sanitation


Capacity

Gross Cubic Feet	49
Net Cubic Feet	43.1
Number of Shelves	6
Individual Shelf Capacity	88 lbs.

Features & Materials

Temperature Range	33-40°F
Ambient Temperature Range	90°F
Defrost Type	Automatic
Cooling Unit Type	Automatic
Refrigerant Type	R290
Horsepower	0.3
Number of Doors	2
Door Material	Stainless-Steel 430
Glass Type	Dual Pane
Door Style	Swing
Reversible Doors	No
Self Closing Door	Yes
Stay Open Feature	Yes
Shelf Material Type	Plastic Coated Steel Wire
Shelves Adjustable	Yes
Temperature Control Type	Digital
Control Location	Exterior
Exterior Material	Stainless-Steel 201
Interior Material	Stainless-Steel 430
Gauge of Stainless-Steel	Exterior: 24 Interior: 26
Color Finish	Stainless-Steel
Interior Color	Stainless-Steel
Door Handle Color	Stainless-Steel
Handle Type	Standard
Interior Lights	LED
Interior Lights Brightness	220 lm
Interior Lights Color	White
Interior Lights Location	Both Sides
Commercial Residential	Commercial
Indoor/Outdoor	Indoor
Door Ajar Alarm	No
Noise	55 dB
Safety Lock	Yes
Casters	4
Compressor Location	Top

Plan View

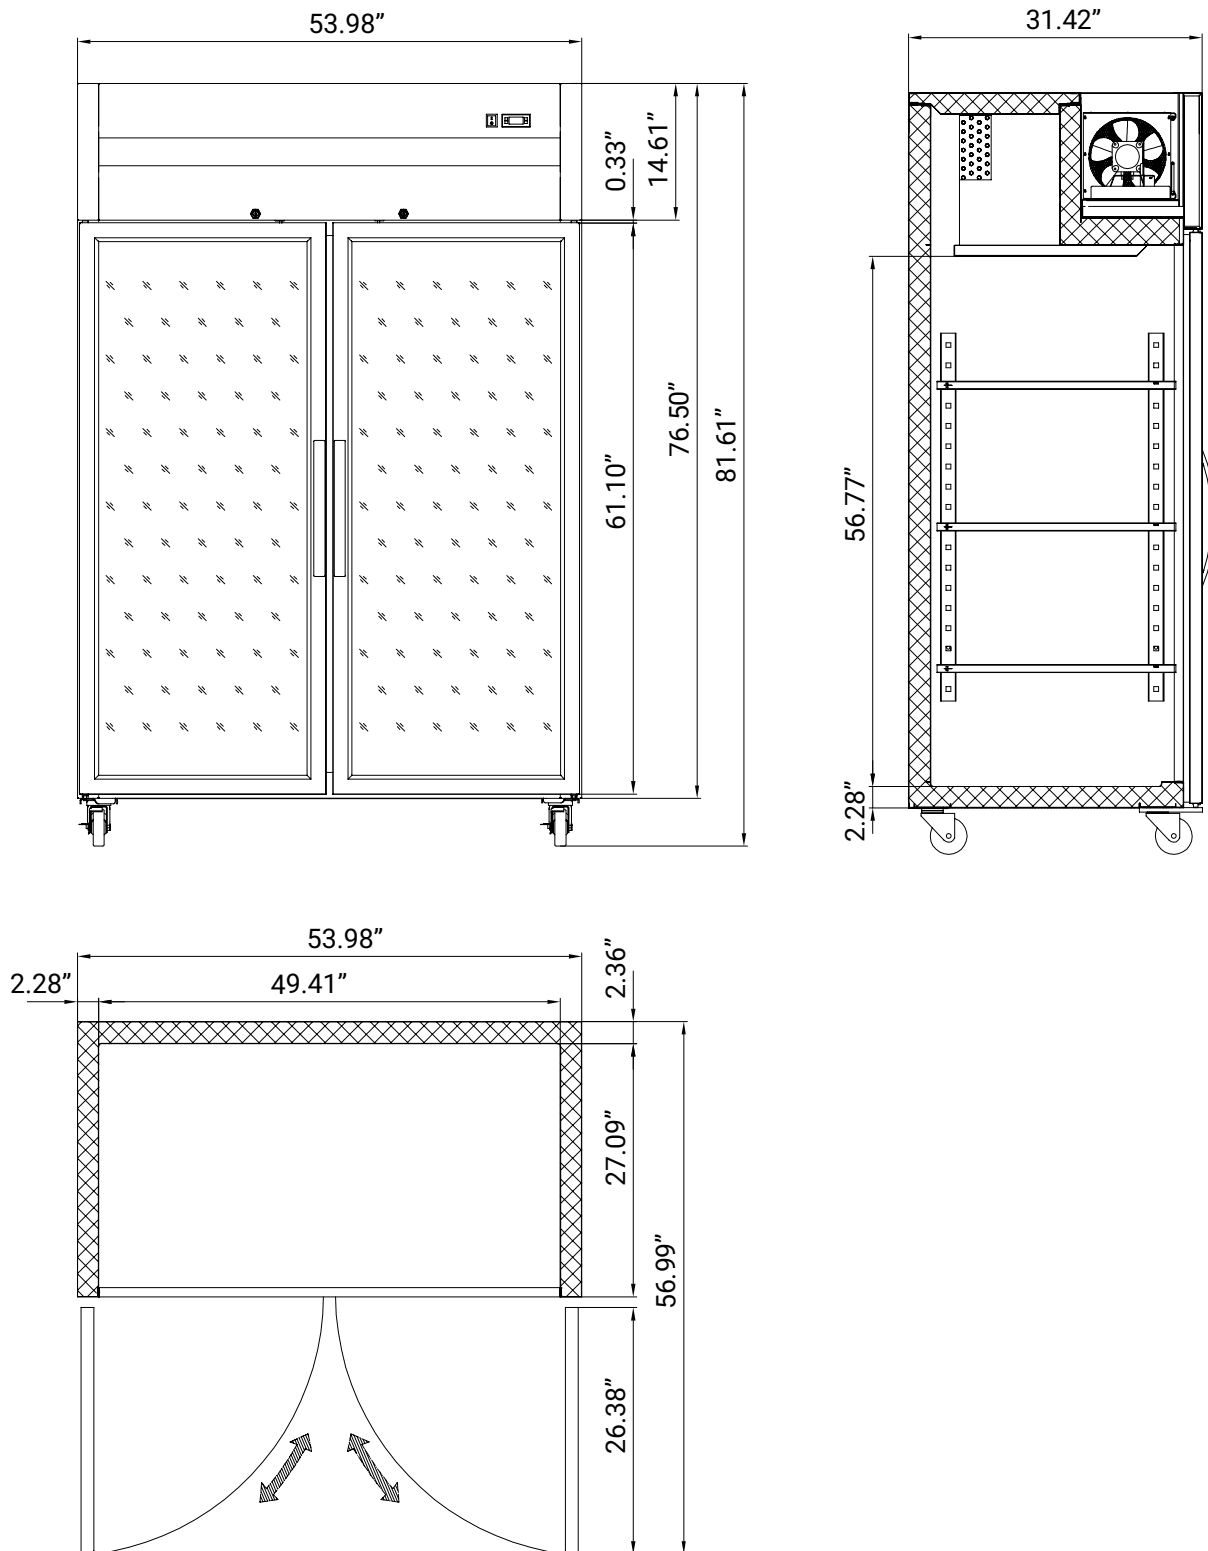

718-576-6342
info@koolmore.com

CERTIFICATIONS

