



SPEC SHEET

24 In. Commercial High-Performance Undercounter Dishwasher in Stainless-Steel


Model: KM-UCD-H1

FEATURES

- **High-Performance Undercounter Commercial Dishwasher:** Compact, space-saving design delivers powerful cleaning performance for restaurants, cafés, bars, and commercial kitchens.
- **Fast Cycle Operation for High-Volume Use:** Equipped with 2 wash cycles (120 sec and 180 sec) to keep up with demanding service environments.
- **High-Temperature Sanitizing System:** Operates at 160°F wash and 185°F final rinse to ensure effective cleaning and sanitation for commercial applications.
- **Durable 304 Stainless Steel Construction:** Built with 304 stainless steel interior and exterior for long-lasting durability, corrosion resistance, and easy cleaning.
- **Complete Rack System for Versatility:** Includes 3 racks with a cutlery basket, flatware, and a glass rack, accommodating a wide range of dishware.
- **Built-In Rinse Aid System for Spot-Free Results:** Integrated rinse aid dispenser improves drying performance, reduces water spots, and enhances glass clarity.
- **Simple Controls with Automatic Operation:** Electromechanical push-button controls with indicator lights, automatic fill, and temperature readiness for easy operation.
- **Water-Efficient and Cost-Effective Performance:** Uses approximately 0.74 gallons per cycle, helping reduce water usage while maintaining strong cleaning power.
- **Integrated Drain Pump for Easy Maintenance:** Push-button drain system allows quick and efficient wastewater removal for daily cleaning.



CLOSE UP IMAGES



Technical Specs

Dimensions & Weight

Length	23.23 in.
Width	24.41 in.
Height	32.48 in.
Weight	134.48 lbs.
Depth With Door Open 90 Degrees	39 in.
Rack Dimensions	20 x 20 in.

Electric & Certifications

Voltage	240
Wattage	7090
Amps	30.1
Hertz	60
Phase	1
Power Cord Included	No
Electrical Installation Type	Hardwired
Energy Consumption	10,351 kWh/year
Certifications	ETL Listed for Safety and Sanitation


Capacity

Number of Cycles	2
Wash Cycles Per Hour	20

Features & Materials

Wash Cycle Time	120 or 180 Seconds
Water Temperature	160-185°F
Control Location	Exterior Top
Control Type	Electromechanical - Push Button
Installation Type	Undercounter
Interior Material	Stainless-Steel
Exterior Material	Stainless-Steel 304
Color Finish	Stainless-Steel
Interior Color	Stainless-Steel
Door Handle Color	Stainless-Steel
Door Style	Downward Swing
Noise	63 dB
Legs Adjustable	Yes, .4 in.
Water Consumption	0.74 Gal/Cycle
Water and Drain lines Included	Yes
Dishwasher Racks	3, Cutlery Basket, Flatware and Glass, 20" x 20", Plastic
Diameter of Water Line Connection	0.75
Diameter of Drain Line Connection	1.31

Plan View

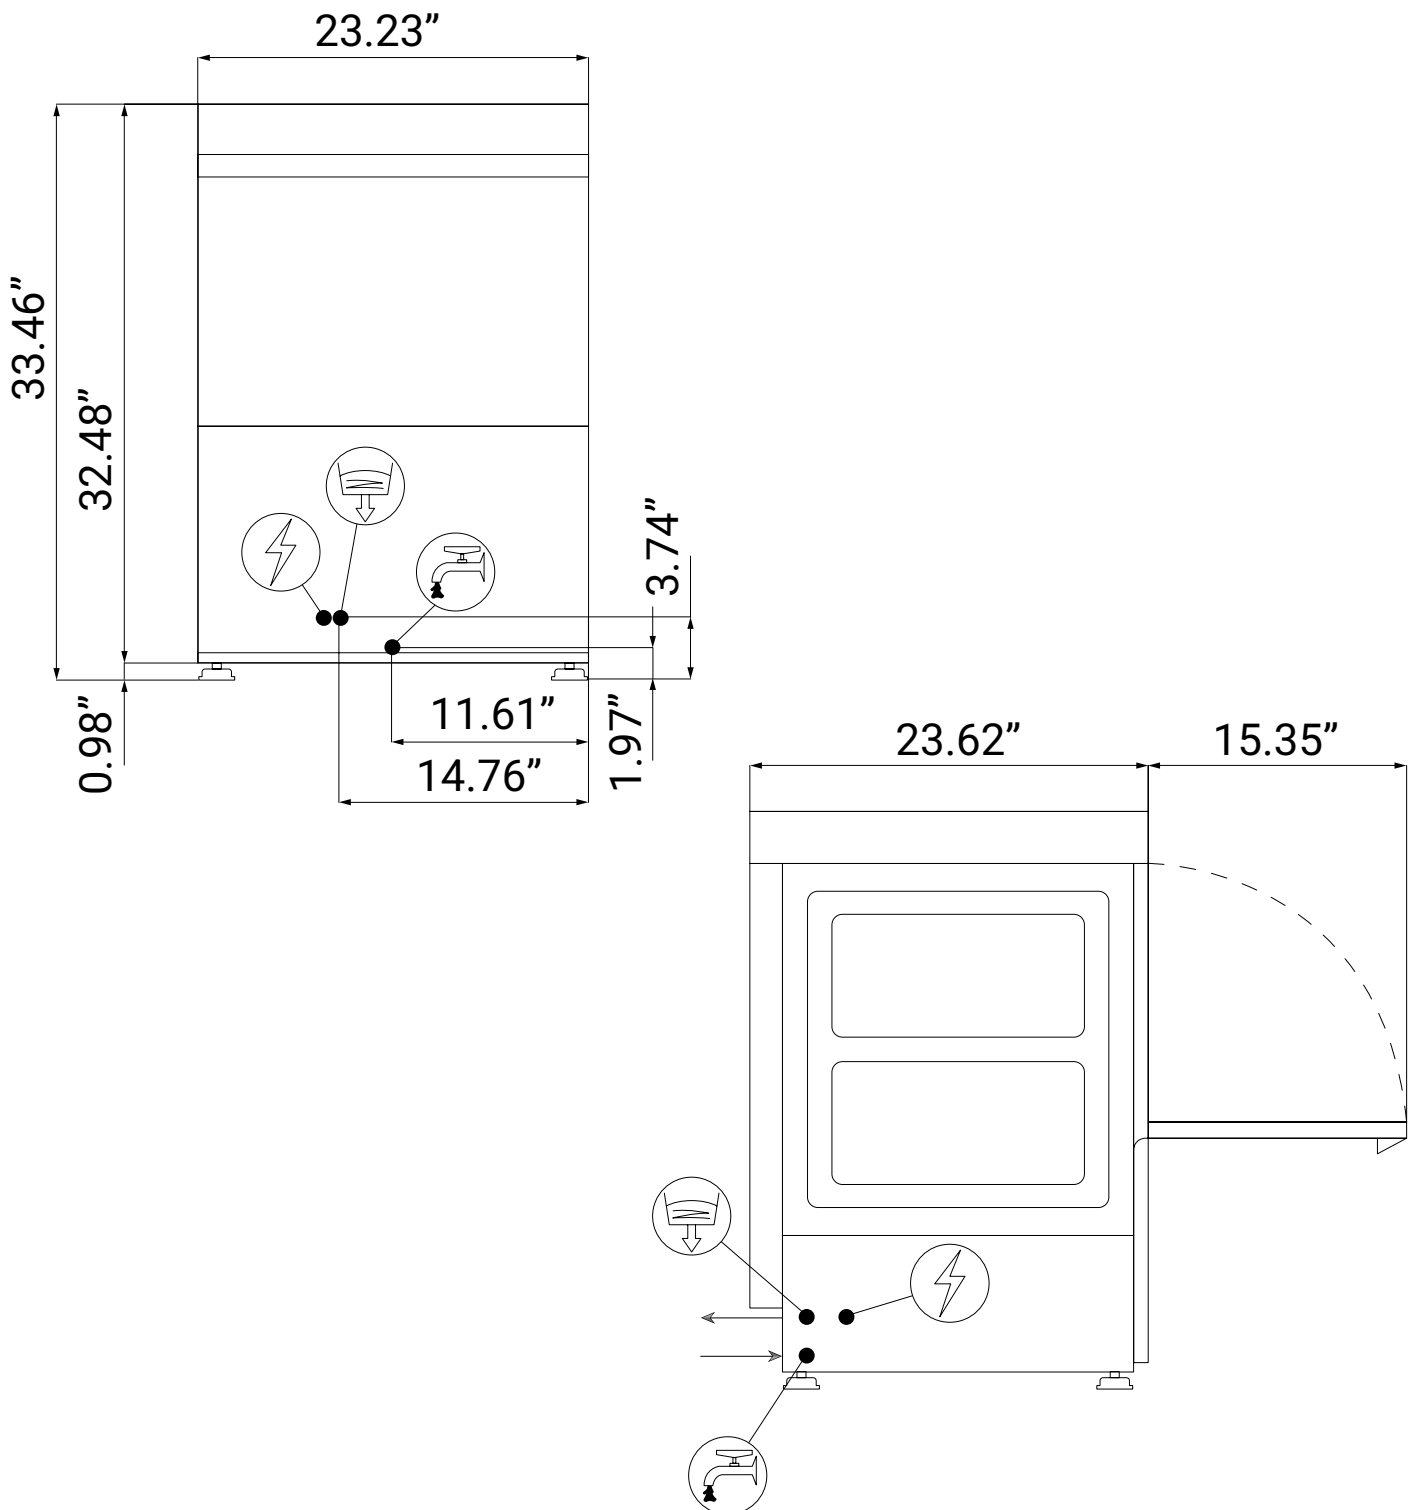

718-576-6342
info@koolmore.com

CERTIFICATIONS

